


# SSP/SSH SERIES DUPLEX FRP BASKET STRAINER INLINE



**PRESSURE RATING: 50-150 PSI**

**MAX TEMP: 220 F**

**SERVICE FLUID: HIGH CORROSIVE**

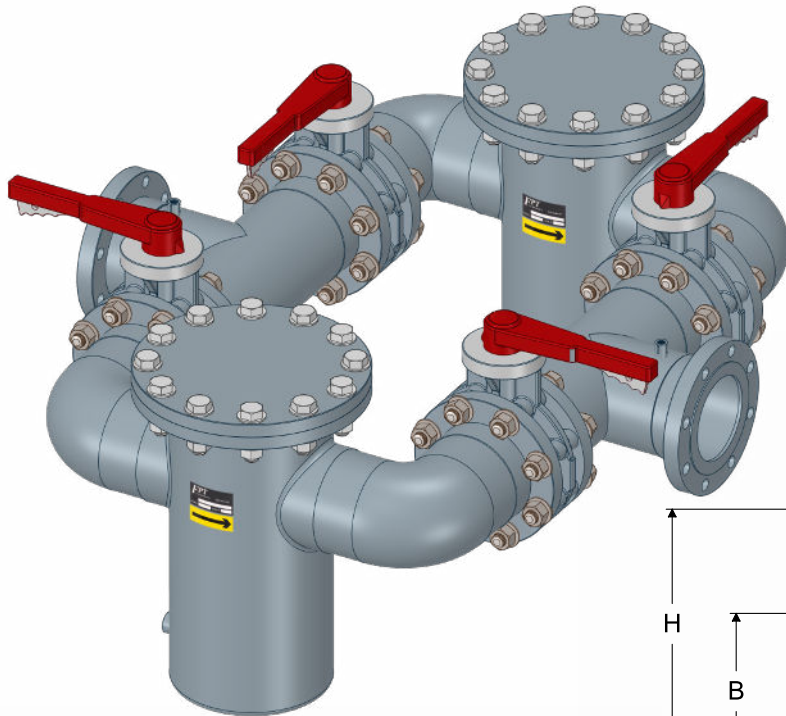

Duplex strainers are a good choice for critical systems for which flow interruption is prohibited. A properly designed composite duplex strainer assembly will allow full flow through one strainer, while the other is isolated and in standby with a clean basket in place. Monitoring the pressure drop via optional pressure taps on inlet/outlet manifold allows for easy identification of when basket becomes fouled and changeover is required.

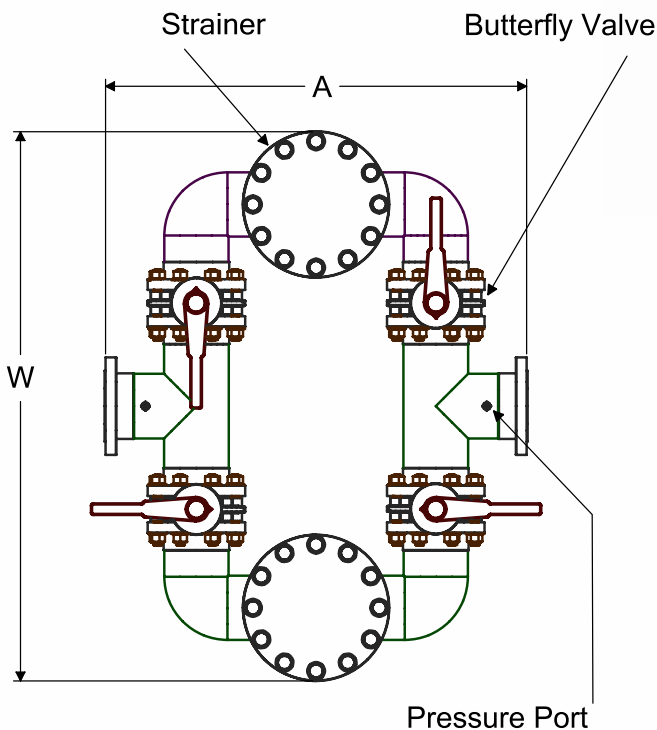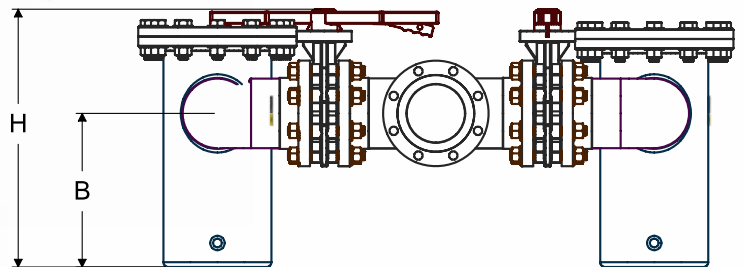

MODEL NO.	Strainer Size	Face to Face (inch) A	Center Line (inch) B	Width (inch) W	Height (inch) H
SSP286102031	2	24	10.5	43	18.125
SSP286103031	3	28	10.5	46.5	18.125
SSP286104031	4	31	11.625	54.5	20.25
SSP286106031	6	42	16	68	26.5
SSP286108031	8	52	21.5	84.5	34.5
SSP286110031	10	64	23	101	37.5
SSP286112031	12	74	31.625	114	46.75
SSP286114031	14	86	32.5	128.5	49
SSP286116031	16	96	37	144	60
SSP286118031	18	109	39	156	63
SSP286120031	20	118	40	165.5	64
SSP286124031	24	144	42	193.5	68

Rev. 11/30/23

